




美式悬式绝缘子

SUSPENSION INSULATORS (ANSI SOCKET&BALL TYPE)

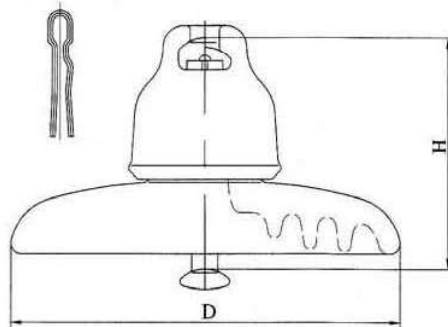

52-3  
52-5  
52-8

ANSI Class		52-3	52-5	52-8
Porcelain Disc Diameter,D,mm		254	254	280
Unit Spacing,H,mm		146	146	146
Creepage Distance,mm		292	292	305
Combined M & E Strength,KN		67	111	160
Impact Strength ,Nm		6	7	10
Routine Proof Test Load,KN		33.5	55.5	80
Time Load Test Value,KN		44	67	107
Power Frequency	Dry,KV	80	80	80
	Flashover Voltage	Wet,KV	50	50
Critical Impulse	Pos,KV	125	125	125
	Flashover Voltage	Neg,KV	130	130
Power Frequency Puncture Voltage,KV		110	110	110
Radio Influence	Test Voltage to Ground,KV	10	10	10
Voltage Data	Max.RIV at 1000 Khz,uV	50	50	50
Net Weight,Approx.,kg		4.6	5.5	7.5

**NOTE:**

1. Standard:comply with the ANSI Standard
- 2.Standard Specification: ANSI C 29.2
- 3.Colour:The glaze colors of the insulators are brown or light gray.