

英标 针式绝缘子
PIN INSULATORS (BS Standard Type)

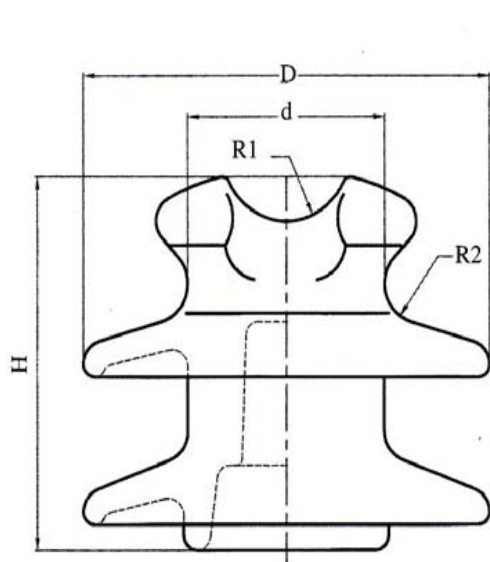


Fig.1

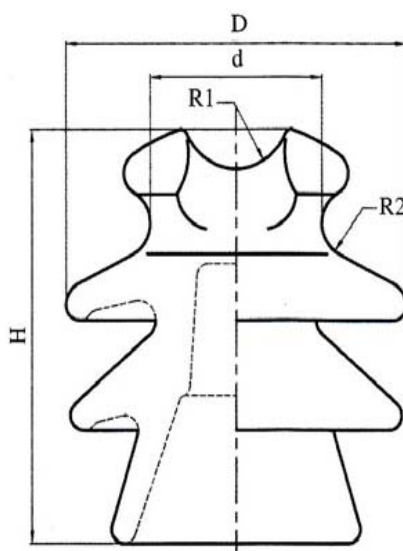


Fig.2

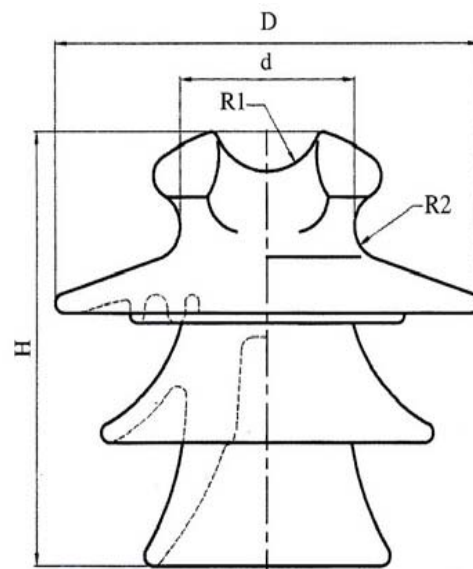


Fig.3

Fig.No.		1	2	2	3	3	3
Voltage Class		11KV	11KV	11KV	33KV	33KV	36KV
Dimensions,mm	R1	11	25	25	16	25	25
	R2	11	14	14	16	16	16
	d	78	78	78	120	120	120
	D	159	159	152	310	310	310/330
	H	133	133	166	245	245	245/255
Creepage Distance,mm		235	235	320	740	740	825
Cantilever Strength,kN		10	10	10	10	10	10
Power Frequency Withstand Voltage,Wet,kV		45	45	50	90	90	90
Impulse Withstand Voltage,kV		95	95	110	200	200	200
Power Frequency Puncture Voltage,kV		130	130	130	210	210	210
Net Weight,Approx.,kg		2.3	2.3	2.5	10.6	10.6	11

NOTE:

- 1. Standard:**comply with the BS Standard
- 2. Colour:**the glaze colors of the insulators are brown or light gray.
- 3. Specification:**These pin type insulators are furnished with cemented zinc thimbles designed to fit the small or large steel head pins specified in BS 137, Part 2.